

SIGNATURE SERIES 8.8" WAKE TOWER SPEAKERS



CODE	PEAK POWER
SG-FT88SPC	330 WATTS
SG-FT88SPWC	330 WATTS

WITH LED LIGHTING OPTIONS



KEY FEATURES



SILK DOME TWEETER

The silk dome tweeter creates a smooth upper frequency response and increased efficiency, which delivers crisp sound and clear highs.

DUAL-COLOR LED LIGHTING DIFFUSER


The LED diffuser cap not only protects the LEDs and circuitry from the harsh marine environment, it evenly disperses color for an unparalleled aesthetic feel.

CURV CONE TECHNOLOGY

CURV is a woven polypropylene composite, heat pressed to form a lighter yet stronger cone, thus producing unprecedented sound definition at a higher output.

LARGE DIAMETER VOICE COIL

Delivering an increase in real power and efficiency, the voice coil provides a sound exclusive to the Signature Series speakers.

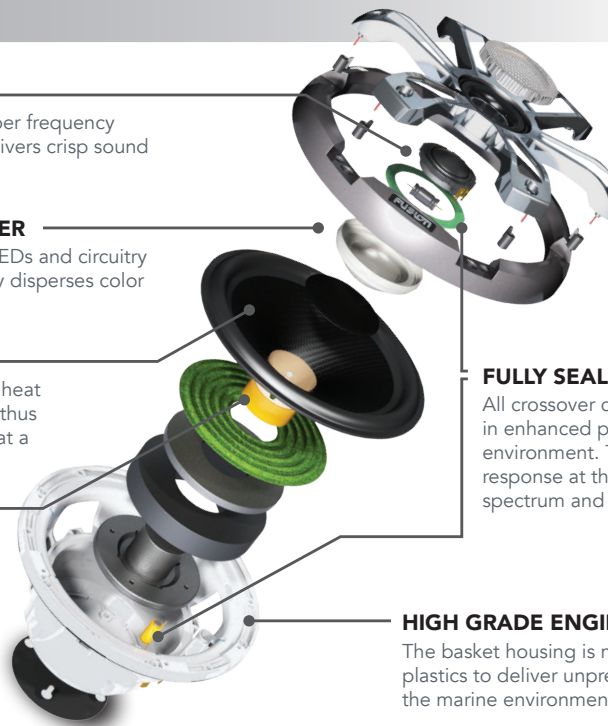

FULLY SEALED CROSSOVER COMPONENTS

All crossover components are sealed, resulting in enhanced protection from the harsh marine environment. This delivers an improved frequency response at the crossover point for a detailed audio spectrum and a new level of acoustic performance.

HIGH GRADE ENGINEERED BASKET CONSTRUCTION

The basket housing is manufactured from high grade engineered plastics to deliver unprecedented durability when exposed to the marine environment.

DUAL-COLOR LED LIGHTING DIFFUSER

The 8.8" Signature Series wake tower speakers feature dual-color diffused LED lighting options that illuminate Striking Blue or Sparkling White to set the mood or start the party.

Note: LED color is determined by wiring polarity at installation. An optional voltage regulator, SG-VREGLED, is available to give you the ability to switch between LED color options and adjust the brightness of the illumination.

STRIKING BLUE



SPARKLING WHITE

FOR MORE INFORMATION VISIT FUSIONENTERTAINMENT.COM

KEY FEATURES

SIGNATURE PERFORMANCE

The acoustic properties of the wake tower speakers have been specifically optimized for wake boat applications. With longer throw, greater cut through and precisely calculated enclosure parameters, the wake tower speakers are designed to reproduce crystal clear audio with high performance at all volume levels.

TRUE MARINE™ PROTECTION

Engineered to withstand the harsh marine environment and tested to international industry standards for UV stability and salt-fog protection, all True-Marine products are also supported by a 3-year limited consumer warranty.



PREMIUM SPORTS AESTHETIC

The Signature Series wake tower speakers incorporate premium materials and marine-specific design elements that communicate not only their premium aesthetics, but their ability to reproduce quality audio and deliver it loud. This results in wake tower speakers that seamlessly integrate with the design of any sports boat.

IP65 WEATHERPROOF

The Signature Series tower speakers are rated IP65 for water and dust ingress protection, while also meeting industry standards for UV and salt fog protection. This makes them perfect for tower installation on any vessel in the marine environment.




ACCESSORIES


MOUNTING BRACKETS

Mounting brackets and inserts can be purchased to mount your 8.8" Signature Series wake tower speakers on to the majority of towers, with either fixed or swivel mounts available. Inserts can be used to fit a wide range of tube diameters.

The optional mounting brackets and inserts are available to suit: 63.5mm (2-1/2 in), ø 60.3mm (2 3/8 in), ø 57.2mm (2 1/4 in), ø 50.8mm (2 in), ø 48.3mm (1-29/32 in), ø 42.2mm (1-21/32 in), ø 33.4mm (1-5/16 in) sizes.



FIXED MOUNT



SWIVEL MOUNT

FUSION PRODUCT INFO

CODE	GARMIN PN	EAN-13 BARCODE
Not available	010-12831-00	0753759218829
Not available	010-12831-20	0753759218928
Not available	010-12831-90	0753759218843

GIFT BOX DIMENSIONS

Not available


SPECIFICATIONS

CONFIGURATION: Coaxial
RMS POWER RATING (WATTS): 130
PEAK POWER (WATTS): 330
TWEETER TYPE: Silk Dome
CONE MATERIAL: CURV
EFFICIENCY (1W/1M): 91db
FREQUENCY RESPONSE: 55Hz – 25kHz
IMPEDANCE: 4 Ohms

SPEAKER AND LED CABLE (WITHOUT TERMINAL): 610mm (2')
VOICE COIL DIAMETER: 1.5"
LED COLOR OPTIONS: White and Blue
LED SUPPLY VOLTAGE: From 10.8 to 16 Vdc
LED LOAD CURRENT AT 14.4VDC: 150mA
ENCLOSURE DIAMETER: 224mm (8-13/16")
ENCLOSURE DEPTH: 381mm (15")
HEIGHT INCL. MOUNTING CLAMP*: 241mm (9-1/2")

*Mounting clamps are required (sold separately).

DIMENSIONS

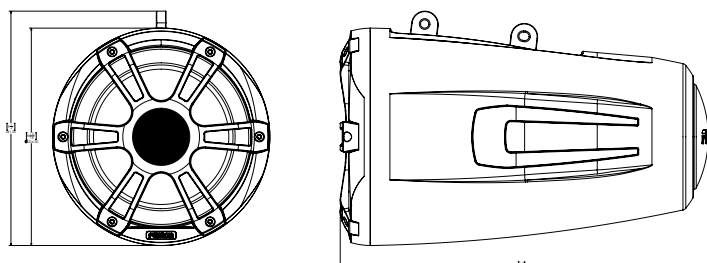

FUSION PRODUCT INFO

CODE	GARMIN PN	EAN-13 BARCODE
SG-FT88SPC	010-02082-00	753759212285
SG-FT88SPWC	010-02082-10	753759213114

GIFT BOX DIMENSIONS

(W) 615mm [24-3/16"] | (H) 440mm [17-5/16"] | (D) 296mm [11-5/8"]